

Cast Iron Valves

주철 10K 플랜지형 볼 밸브

CAST IRON 10K FLANGED BALL VALVE

Main parts and materials

Parts name	Material
Body	Grey iron
Ball	Stainless steel
Stem	Stainless steel
Gland	PTFE


Specification

Applicable Fluid	Water	
Working Pressure	Less than 10kgf/cm ² (Max. 1.0MPa)	
Applicable Temperature	Less than 80°C	
Connection Method	10K FF Flange	
Hydraulic Test	Body	20kgf/cm ² (2.0MPa)
	Seat	16kgf/cm ² (1.6MPa)



Outline and connecting measurement

Size	L	D	b	Z × φ d	H	Do
40	165	140	19	4 × φ 19	134	271
50	180	155	20	4 × φ 19	139	271
65	190	175	20	4 × φ 19	153	271
80	200	185	21	8 × φ 19	162	271
100	230	210	22	8 × φ 19	172	271
125	265	250	22	8 × φ 23	221	310
150	277	280	23	8 × φ 23	233	310
200	340	330	26	12 × φ 23	265	313

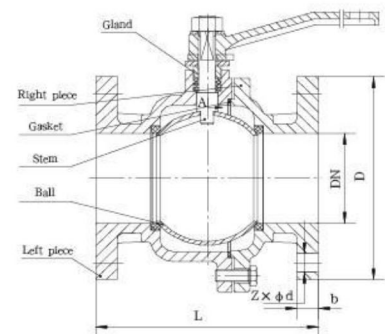

*The above specifications to be varied to suit your specific requirements.