
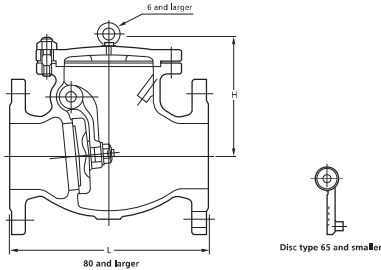


10K SWING CHECK VALVE Pressure-Temperature Rating: JIS B2220

10UOA(T)
10UOAM(T)



Parts	10UOA(T)*	10UOAM(T)*
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SCS13A	SCS14A
Disc nut**/**	SUS304	SUS316L
Gasket	Refer to Page 10	
Hinge pin	SUS304	SUS316
Plug	SUS304	SUS316
Arm**	SCS13A	SCS14A
Washer**	SUS316, SUS316L (3 to 6)	
Cover bolt/nut	SUS304/304	
Split pin	SUS316L	
Name plate	A1050P	


* (T) Suffixing stands for the provision of ceramic filled PTFE gaskets
 ** For size 80 and larger
 Note: Body seats and/or disc seats can be optionally hard-faced.

Items	
Face to face dimensions	ASME B16.10 Class 150
End flange dimensions	JIS B2220 10K
Wall thickness	ASME B16.34 Class 150

Nominal Size	1 1/2	2	2 1/2	3	4	5	6	8	10	12	14	16	
	40	50	65	80	100	125	150	200	250	300	350	400	
L	in.	6.50	7.99	8.50	9.49	11.5	13.0	14.0	19.5	24.5	27.5	31.0	34.0
	mm	165	203	216	241	292	330	356	495	622	698	787	864
H	in.	4.37	4.76	5.28	5.83	6.38	7.56	8.54	10.39	11.3	12.4	14.3	16.0
	mm	111	121	134	148	162	192	217	264	287	315	363	407

20K SWING CHECK VALVE Pressure-Temperature Rating: JIS B2220

20UOA
20UOAM

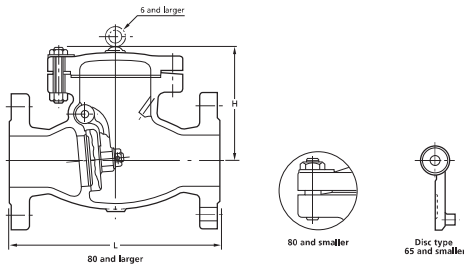

Parts	20UOA	20UOAM
Body	SCS13A	SCS14A
Cover	SCS13A	SCS14A
Disc	SCS13A	SCS14A
Gasket	Refer to Page 10	
Disc nut*/*	SUS304	SUS316L
Hinge pin	SUS304	SUS316
Plug	SUS304	SUS316
Arm*	SCS13A	SCS14A
Washer*	SUS316, SUS316L (3 to 6)	
Cover bolt/nut	SUS304/304	
Split pin	SUS316L	
Name plate	A1050P	

* Size 80 and larger
 Note: Body seats and/or disc seats can be optionally hard-faced.

Items	
Face to face dimensions	ASME B16.10 Class 300
End flange dimensions	JIS B2220 20K
Wall thickness	ASME B16.34 Class 300

Nominal Size	1 1/2	2	2 1/2	3	4	5	6	8	10	12	
	40	50	65	80	100	125	150	200	250	300	
L	in.	9.49	10.5	11.5	12.5	14.0	15.8	17.5	21.0	24.5	28.0
	mm	241	267	292	318	356	400	444	533	622	711
H	in.	4.76	5.63	6.42	7.01	7.91	9.09	10.2	11.5	14.0	14.7
	mm	121	143	163	178	201	231	259	292	356	373